


AMR 5000

Déchargement parlym E6676

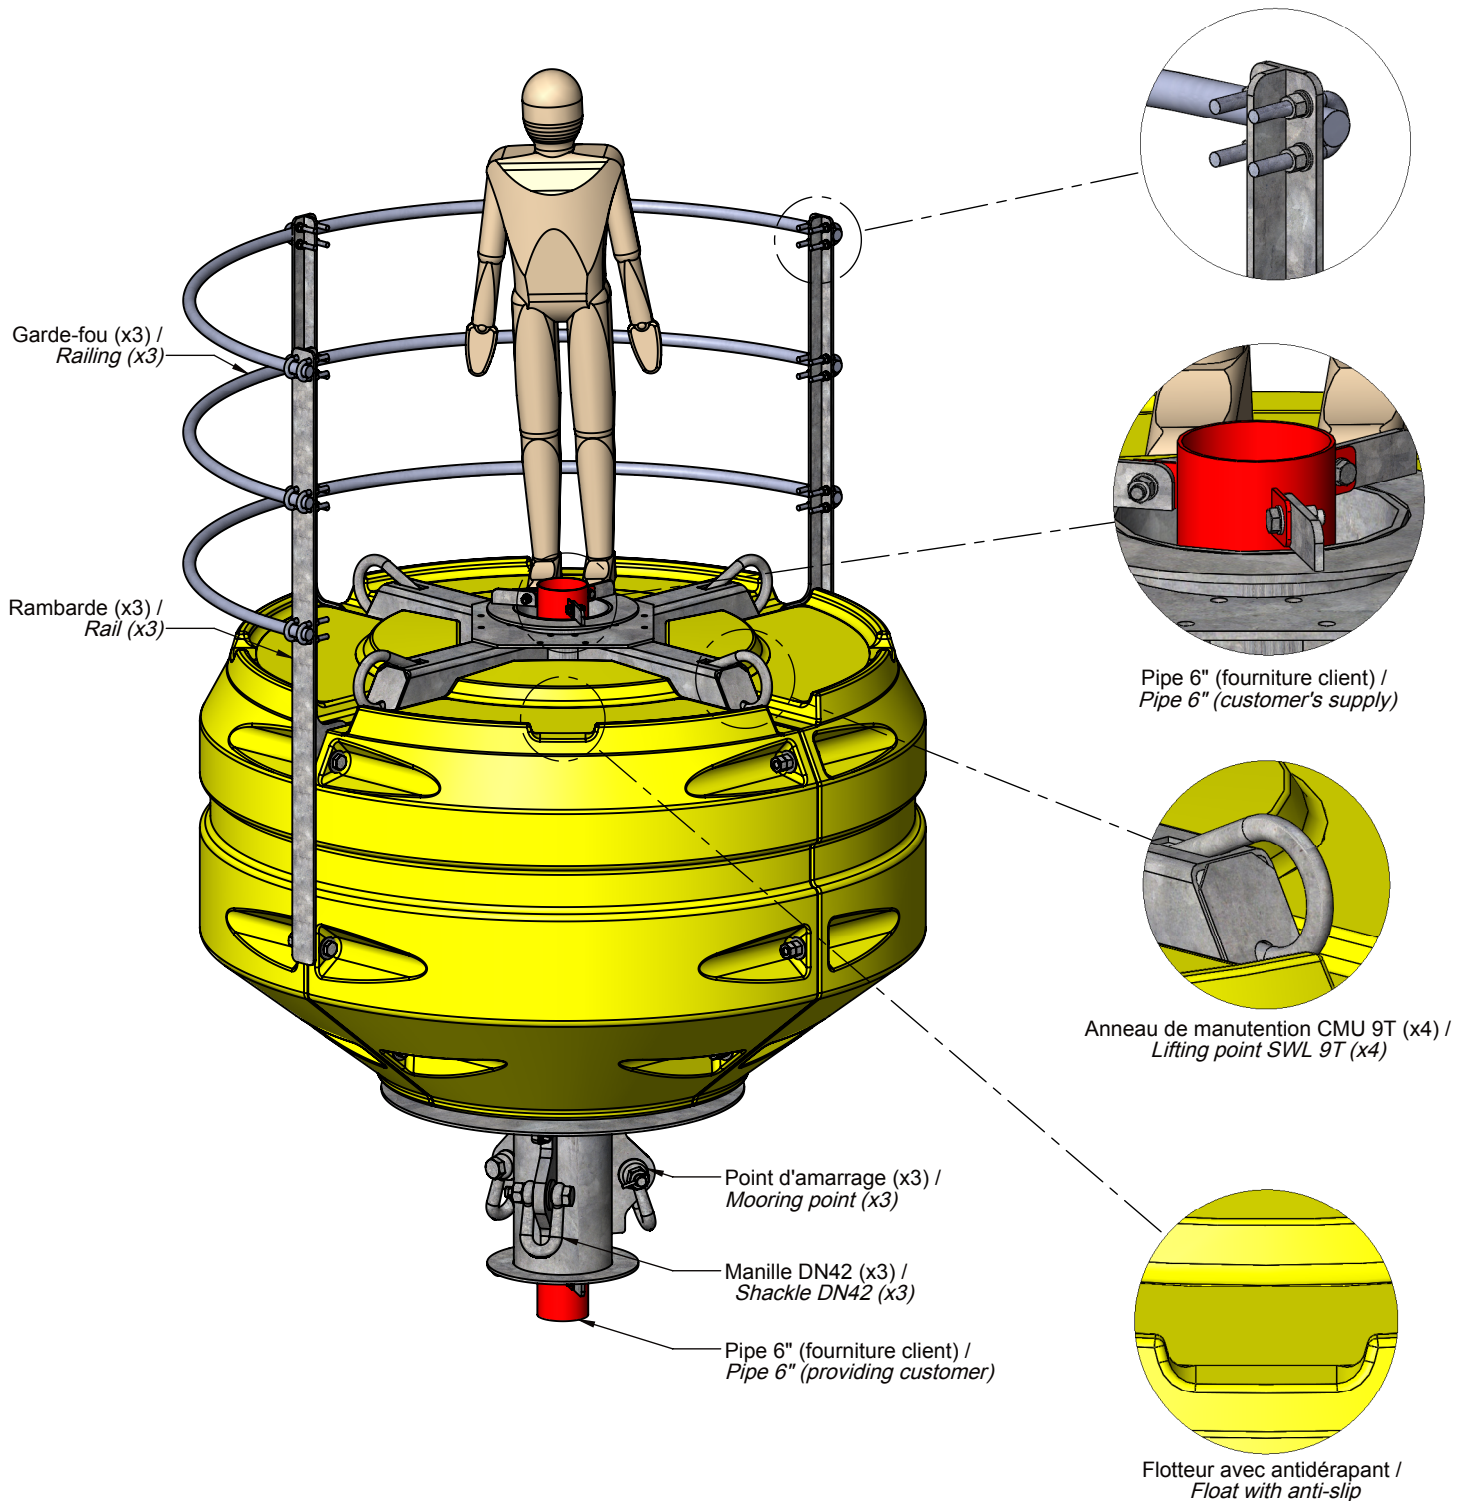

temp01-AMR5000 E6676



MOBILIS - BP 49000 - 13792 Aix-en-Provence cedex 3 - France - Tel.: +33 (0)4 42371500 Fax: +33 (0)4 42371501
www.mobilis-sa.com E-mail: mobilis@mobilis-sa.com

Images specifications et dimensions non-contractuelles / Images and specifications for information only



par JL	REF	ED
rev:	IT10	02
n°: 1/2	03/02/2011	

AMR 5000 Déchargement parlym E6676

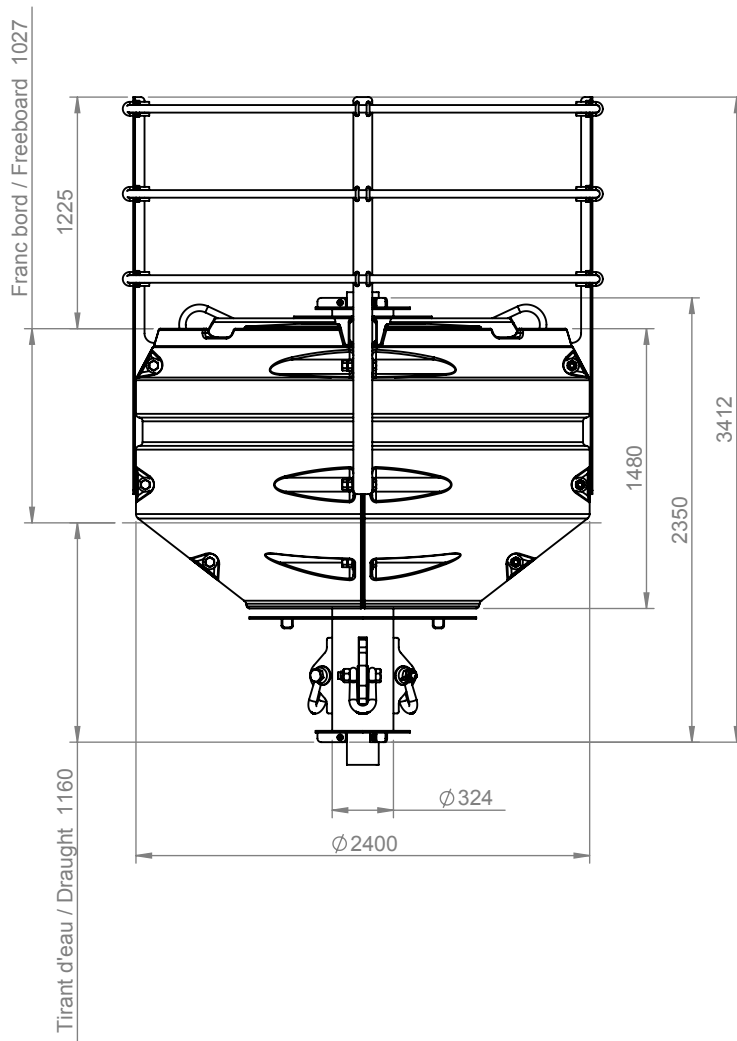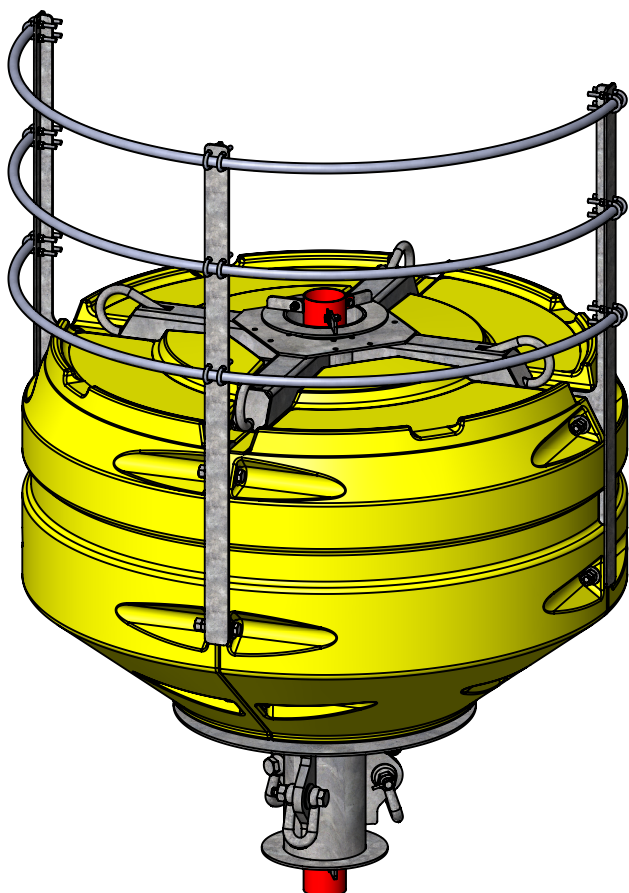

Spécification générales General Specifications

Masse /
Weight

Kg

1150

Surface Visible / Visible Area

m²

- / -

Flottabilité par Centimètre /
Submergence

Kg
/cm

44

Spécifications matière Material specifications

Structure / Structure

Acier-S235 Galvanisé / Hot dip galvanized steel-S235

Flotteurs / Floats

Polyéthylène basse densité / Low density polyethylene

Rambarde / Rail

Acier-S235 Galvanisé / Hot dip galvanized steel-S235

Garde-fou / Railing

Polyéthylène haute densité / High density polyethylene

Réflecteur Radar / Radar Reflector

- / -

Lest / Ballast

- / -

temp01-AMR5000 E6676

MOBILIS - BP 49000 - 13792 Aix-en-Provence cedex 3- France - Tel.: +33 (0)4 42371500 Fax: +33 (0)4 42371501

www.mobilis-sa.com E-mail: mobilis@mobilis-sa.com

Images specifications et dimensions non-contractuelles / Images and specifications for information only



par JL

REF

ED

rev:

IT10

02

n°: 2/2

03/02/2011

