

MOORING BUOYS




DIMENSIONS (m)


Model	AMR 600 G- HOOK	AMR 600	AMR 600 DOUBLE SHACKLE	AMR 600 CONE- UP
Ø: Diameter	1,2	1,2	1,2	1,2
OH : Overall height	2,1	2	2	1,5
TE : Draught	0,7	0,9	0,9	0,5
FB : Freeboard	0,6	0,4	0,4	0,6
A : Structure	1	1	1,2	—

SPECIFICATIONS


Model	AMR 600 G- HOOK	AMR 600	AMR 600 DOUBLE SHACKLE	AMR 600 CONE- UP
Weight (t)	0,17	0,16	0,18	0,22
Buoyancy (kg/cm)	12			
SWL (t)	12	12	12	12
Applications	High sea, coastal, estuary, ports, rivers	Coastal, estuary, ports, rivers	Coastal, estuary, ports, rivers	High sea, coastal, estuary, ports, rivers
Structure	Glassflake reinforced coated steel or hot dip galvanize			
Floats	Medium density polyethylene 16 years UV protected			

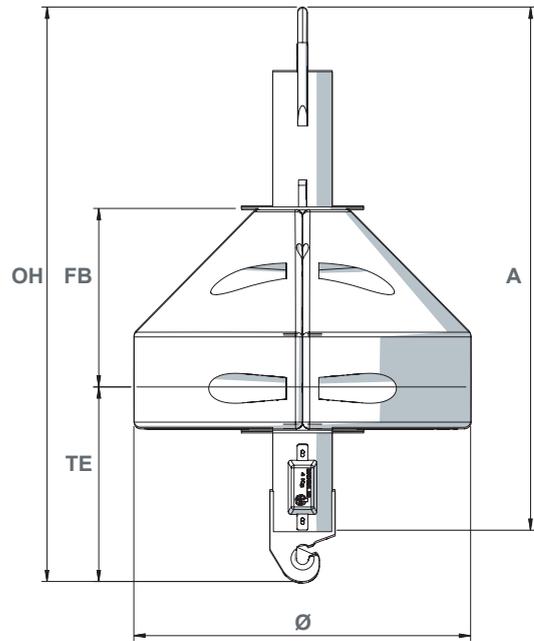


AMR 600 G-HOOK

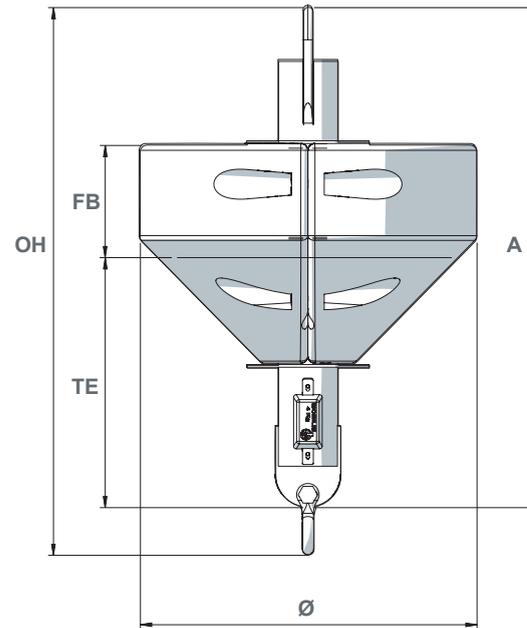

AMR 600

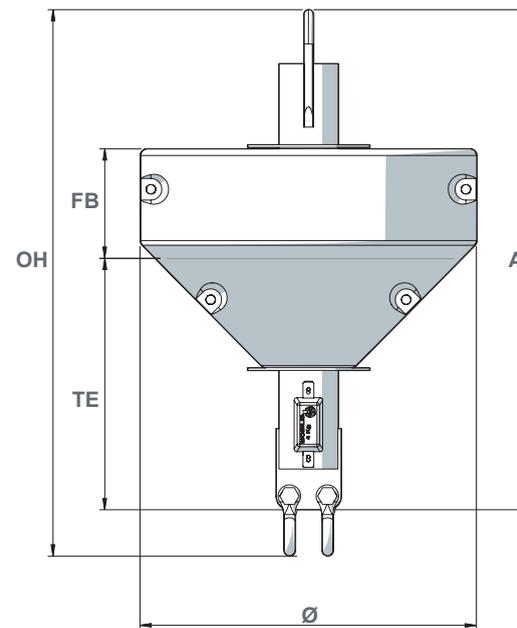

AMR 600 DOUBLE SHACKLE

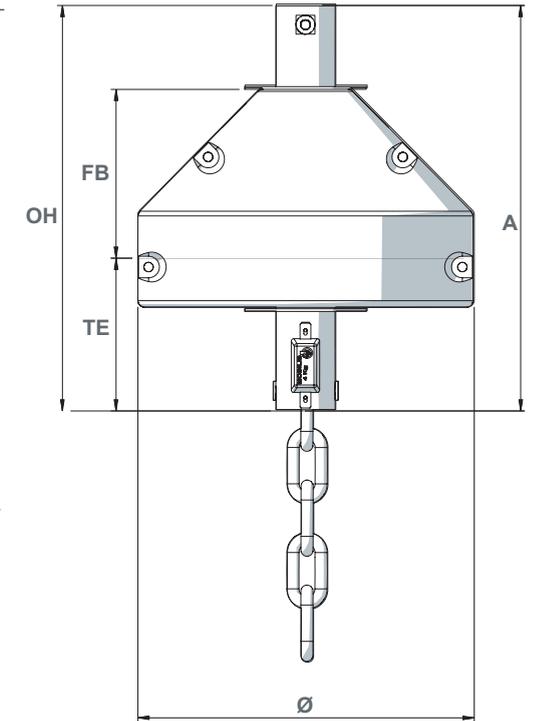

AMR 600 CONE UP
THROUGH-CHAIN

Non-contractual illustrations and photos



DIMENSIONS (m)

Model	AMR 1000 static T	AMR 1000 10t	AMR 1000 10t
Ø: Diameter	1,24	1,24	1,24
OH: Overall height	1.75	1.75	1.75
TE : Draught	0,7	0,7	0,7
FB: Freeboard	0,6	0,5	0,5
A: Structure	1,7	1,8	1,8
B: Hauteur flotteur	0,8	0,8	0,8


SPECIFICATIONS

Model	AMR 1000	AMR 1000 10t	AMR 1000 10t
Weight (t)	198	181	180
Buoyancy (kg/cm)		12	
SWL (t)		12	
Applications	High sea, coastal, estuary, ports, rivers		
Structure	Hot dip galvanized glassflake reinforced coated steel structur		
Floats	Medium density polyethylene 16 years UV protected		




AMR 1000 STATIC T


Anchoring elements (skackles, chains, swivels, sinkers) are available in the mooring accessories section in the catalogue

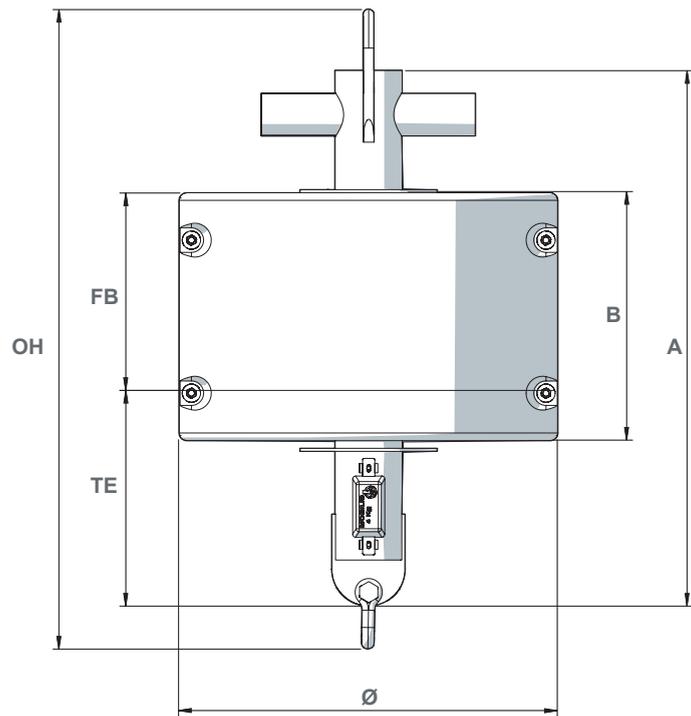

AMR 1000 STATIC T

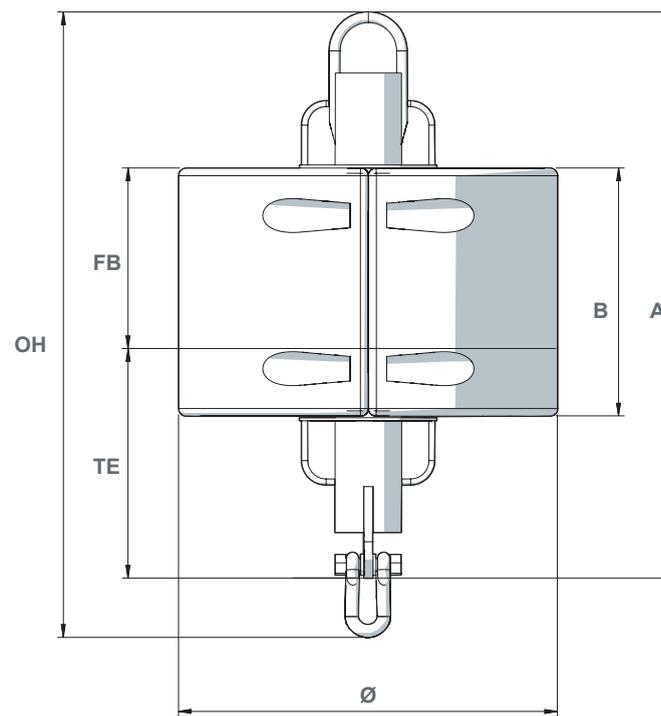

AMR 1000 20t

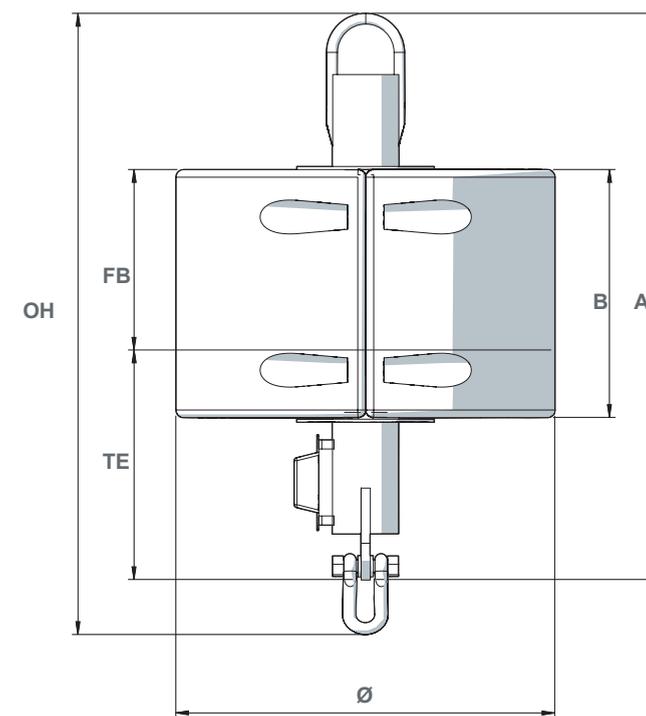

AMR 1000 10t



DIMENSIONS (m)

Model	AMR 2000	AMR 2000 2O	AMR 1500	AMR 1500 2O
Ø: Diameter	1,24		1,24	1,24
OH: Overall height	2,9		2,9	2,9
TE : Draught	0,7	1	0,7	1,1
FB: Freeboard	1,4	1,1	1,4	0,9
A: Structure	2,6	2,6	2,6	2,6





SPÉCIFICATIONS

Model	AMR 2000	AMR 2000 2O	AMR 1500	AMR 1500 2O
Weight (t)	0,33		0,28	
Buoyancy (kg/cm)	12			
SWL (t)	12	12	12	12
Applications	High sea, coastal, estuary, ports, rivers			
Structure	Glassflake reinforced coated steel structur			
Floats	Low density polyethylene 16 years UV protected			



AMR 1000 STATIC T

Anchoring elements (skackles, chains, swivels, sinkers) are available in the mooring accessories section in the catalogue

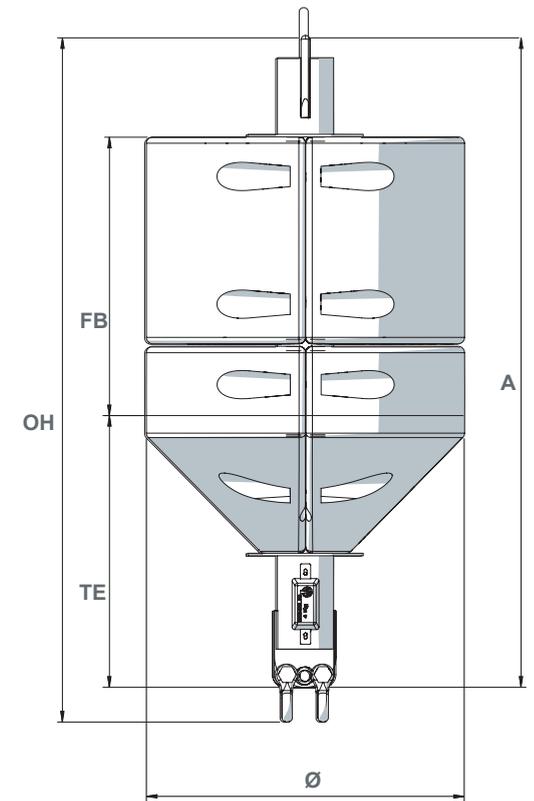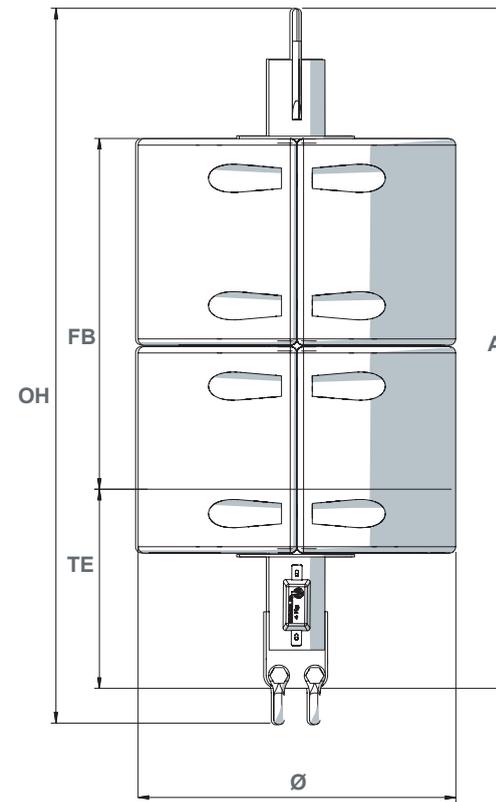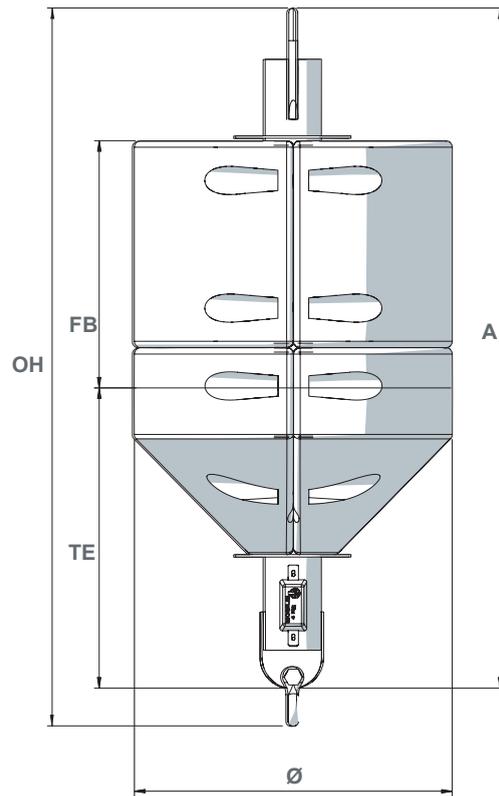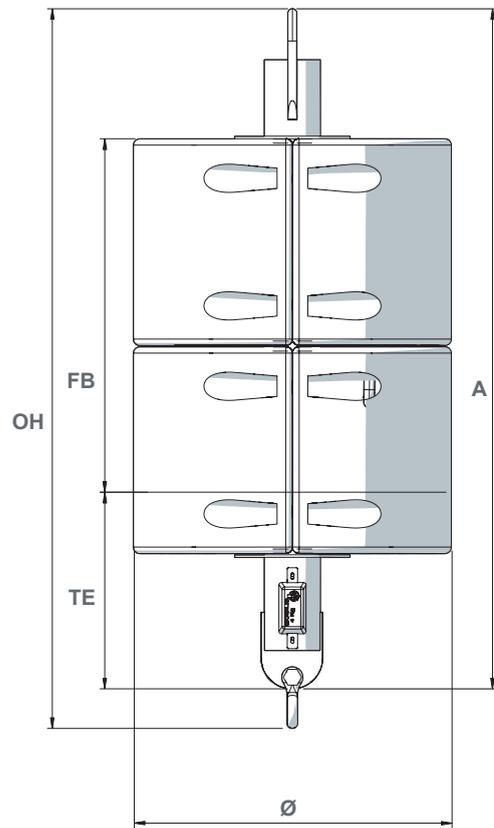

AMR 2000

AMR 1500

AMR 2000 20

AMR 1500 20

Non-contractual illustrations and photos